

## HD PRO

Series marked for the installer looking for a high-level camera emphasizing the difference in image quality. The Pro series cameras are suitable for indoor and outdoor applications where professional video surveillance is required.





# DI-380A-28

## 8MP Fixed Lens Small Dome/Turret Camera With IR LED

This 4K dome/turret camera presents a stunning 8-megapixel image, equipped with a 2.8mm fixed lens, it is designed for short distance surveillance systems (up to 20m) for both indoor and outdoor scenarios. Featuring 4in1 technology selectable by a protected dipswitch the camera is ideal for Plug & Play over existing analog infrastructure.



8  
MP

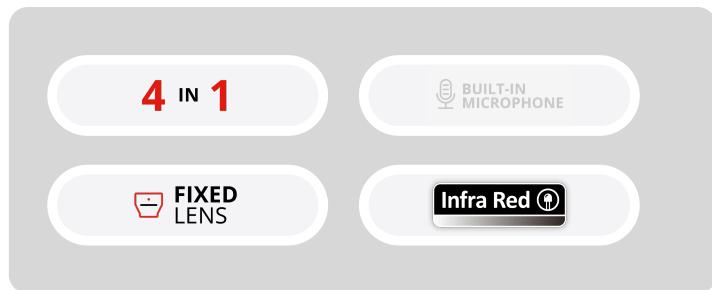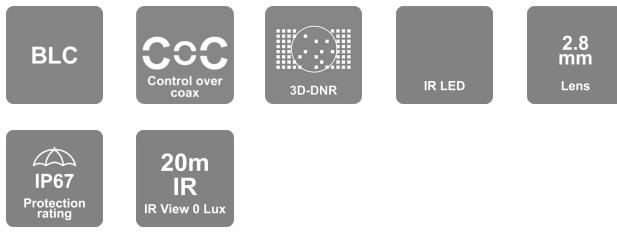

## MAIN FEATURES

- DI-380A-28 8MP Fixed Lens Small Dome/Turret Camera With IR LED
- Sensor: 1/2.5" 8MP CMOS Sensor
- Selectable Output: 8MP: 3840×2160 AHD/TVI/CVI 5MP: 2592×1944 AHD/TVI 4MP: 2560×1440 AHD/TVI/CVI CVBS: 700TVL
- Lens: 2.8mm Mega-Pixel Fixed (89.3°)
- True Day&Night-ICR
- 3D-DNR
- BLC
- Illumination: 20m (1 High-Power IR LED)
- IP67
- Weight: 485g
- Power: DC12V/340mA



<https://provision-isr.com>

## SPECIFICATIONS

| Video                         |   |
|-------------------------------|---|
| <b>Image Sensor</b>           | 1/2.5" 8MP CMOS Sensor  |
| <b>Image Format</b>           | 8MP/4MP - 16:9, 5MP - 4:3   |
| <b>Effective Pixels</b>       | 3864x2202   |
| <b>Scanning System</b>        | Progressive   |
| <b>Min. Illumination</b>      | Color : 0.01lux @F1.2, AGC ON B/W : 0lux with IR  |
| <b>Day &amp; Night</b>        | True Day&Night-ICR  |
| <b>Day &amp; Night Modes</b>  | Ext/Auto/Day/Night  |
| Compression                   |   |
| <b>Resolution</b>             | 8MP: 3840x2160 AHD/TVI/CVI 5MP: 2592x1944 AHD/TVI 4MP: 2560x1440 AHD/TVI/CVI CVBS: 700TVL |
| <b>Frame Rate</b>             | 8MP @ 12/15FPS, 5MP @ 20FPS, 4MP @ 25/30FPS, CVBS @ 25/30FPS                              |
| Image                         |   |
| <b>Backlight Compensation</b> | BLC   |
| <b>S/N Ratio</b>              | ≥52dB (AGC OFF)   |
| <b>Privacy Zone</b>           | no  |
| <b>Noise Reduction</b>        | 3D-DNR  |
| <b>Image Enhancement</b>      | BLC   |
| On Screen Data                |   |
| <b>CoC Support</b>            | Yes   |
| <b>OSD Menu</b>               | Available via CoC Only  |
| Lens                          |   |
| <b>Field of View</b>          | 2.8mm Mega-Pixel Fixed (89.3°)  |
| <b>Iris</b>                   | Fixed Iris  |
| <b>Lens Mount</b>             | M12 Mount   |

| Connectivity       |                                   |
|--------------------|-----------------------------------|
| Audio Connectivity | N/A                               |
| Housing            |                                   |
| Illumination       | 20m (1 High-Power IR LED)         |
| Bracket            | 3-Axis Bracket                    |
| Protection Rate    | IP67                              |
| Dimensions         | Φ97*82.6mm                        |
| Weight (gross)     | 485g                              |
| Power              | DC12V/340mA                       |
| Work Environment   | -30°C ~ 50°C , 10% ~ 90% humidity |

## DIMENSIONS

