

HD PRO


Series marked for the installer looking for a high-level camera emphasizing the difference in image quality. The Pro series cameras are suitable for indoor and outdoor applications where professional video surveillance is required.



DL-392A37

2MP Fixed Lens Hidden Camera

1080P HD Analog 4in1 Camera • 3.7mm Pinhole Lens

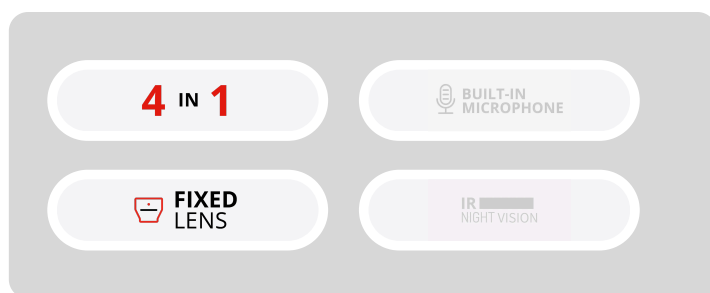

MAIN FEATURES

- DL-392A37 2MP Fixed Lens Hidden Camera
- Sensor: 1/3" 2MP CMOS Sensor
- Selectable Output: 2MP: 1920×1080 AHD/TVI/CVI 1MP: 1280×720 AHD/TVI/CVI CVBS: 700TVL
- Lens: 3.7mm Pinhole Lens (78°)
- True Day&Night-ICR
- 3D-DNR For AHD / CVI / TVI, 2D-DNR For CVBS
- HLC/BLC
- Weight: 210g
- Power: DC12V±10%, ~72mA



<https://provision-isr.com>

SPECIFICATIONS

Video	
Image Sensor	1/3" 2MP CMOS Sensor
Image Format	16:9
Effective Pixels	1984x1225
Scanning System	Progressive
Min. Illumination	0.01Lux
Day & Night	True Day&Night-ICR
Day & Night Modes	Ext/Auto/Day/Night
Compression	
Resolution	2MP: 1920x1080 AHD/TVI/CVI 1MP: 1280x720 AHD/TVI/CVI CVBS: 700TVL
Frame Rate	25/30FPS
Image	
Backlight Compensation	BLC/HLC
S/N Ratio	≥72dB (AGC OFF)
Privacy Zone	yes
Noise Reduction	3D-DNR For AHD / CVI / TVI, 2D-DNR For CVBS
Image Enhancement	BLC, HLC
Image Orientation	Freeze, Mirror, Negative Image
On Screen Data	
CoC Support	Yes
OSD Menu	Available via CoC Only
Lens	
Field of View	3.7mm Pinhole Lens (78°)
Iris	Fixed Iris

Lens Mount	M12 Mount
Connectivity	
Video Output	2MP / 1MP (Selected by OSD Menu) AHD/TVI/CVI/CVBS + PAL/NTSC
Audio Connectivity	N/A
Housing	
Illumination	N/A
Dimensions	Ø90*55mm
Weight (gross)	210g
Power	DC12V±10%, ~72mA